

Product Name	Part No
Fc upc single mode optical fiber pigtail tight buffer 900 micron	JTPIFCPOS2SXBA1S

Description

Fiber optical pigtails are used in telecom, Datacom networks and also used for high speed metropolitan and access network. Optical pigtails are terminated with standard connectors which gives optimum optical performance. The semi tight buffer meets a need in the marketplace for pigtails that are suitable for use in fusion splicers, but can be easily stripped to longer lengths than tight buffer pigtails.


- FEATURES**
- Low insertion loss and back reflection loss
 - Good exchangeability
 - Good Durability
 - High temperature stability

- APPLICATIONS**
- FTTx
 - Telecommunication networks
 - Local area networks(LAN)
 - Wide area networks(WAN)
 - Premise installations

;

Connector A:	FC
Insertion Loss:	≤0.25dB
Polish:	UPC
Wavelength:	1310nm/1550nm
Jacket Material:	PVC
Return Loss:	≥50dB
Operating Temp Range:	-40~75°C
Fiber Mode:	9/125μm, SM
Durability:	>1000 Times
Connector B:	Unterminated
Cable Diameter:	0.9mm
Fiber Type:	Simplex
Jacket Color:	Yellow

Storage Temp Range:	-45~85°C
Interchangeability:	≤0.2dB
Vibration:	≤0.2dB

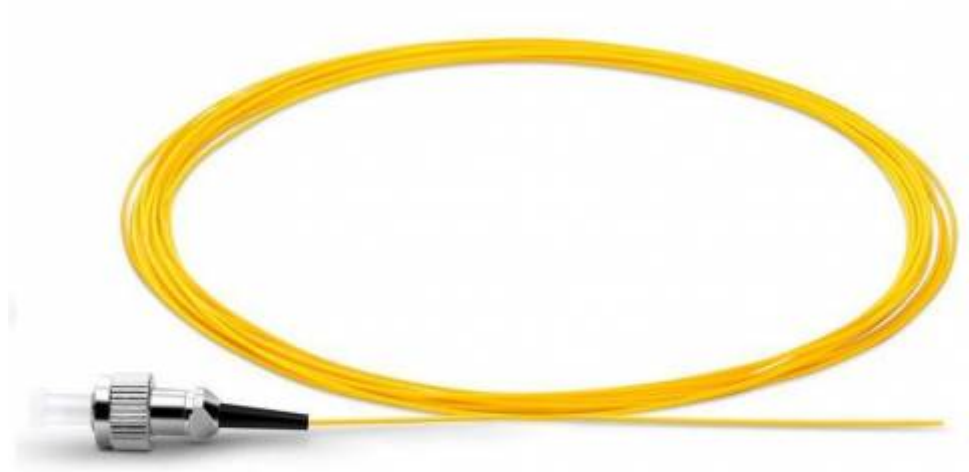

WWW.JTOPTICS.COM

INFO@JTOPTICS.COM